

SMETA ELECTRIC APPLIANCES CO.,LTD.

Smeta Industrial Park, No.71, Shuyun East Road, Chengyang District, Qingdao,China. Website: www.smetagroup.com

Email : <u>info@smetagroup.com</u>

Tel: +86532-80930500

Phone: +8615953202399















- Table Top 01-02
- Freestanding 03-06
- Full Built-in 07-09
- Semi Built-in 10-13



ABOUT US

Grow with Smeta

Qingdao Smeta Electric Appliances Co., Ltd. (SMETA) was established in 1999. After many years of hard work, we have become a normalized and professional enterprise. Now SMETA has a staff of 600 persons and an annual output of 350 million Yuan. One sole proprietorship factory and two joint venture factories which are equipped with top-level production equipment and testing facilities can provide support for us.

Company Culture

At SMETA we work as a close-knit family, not only within ourselves but also with our clients. We believe that unity and teamwork make the path for our success. Our mutual trust fosters a culture that embraces curiosity and challenges, which allows us to exceed our clients expectations and succeed in every way.

Our Vision

To be the top manufacturer and exporter of electric home appliances, offering high quality products developed by creative thinking to ensure customers' total satisfaction.


Social Responsibility

Smeta is a great place to work. We care about our people and think about our employees as partners to cultivate the full potential of them and encourage them to pursue work-life balance.

We believe in the coexistence of humans and nature to reach the productive harmony, capable of fulfilling social and economic requirements for present and future generations.

Our Mission

We are customer-centric and create a future growth market. We encourage and demand in-depth development and responsible actions. We are always one step ahead of the competition.

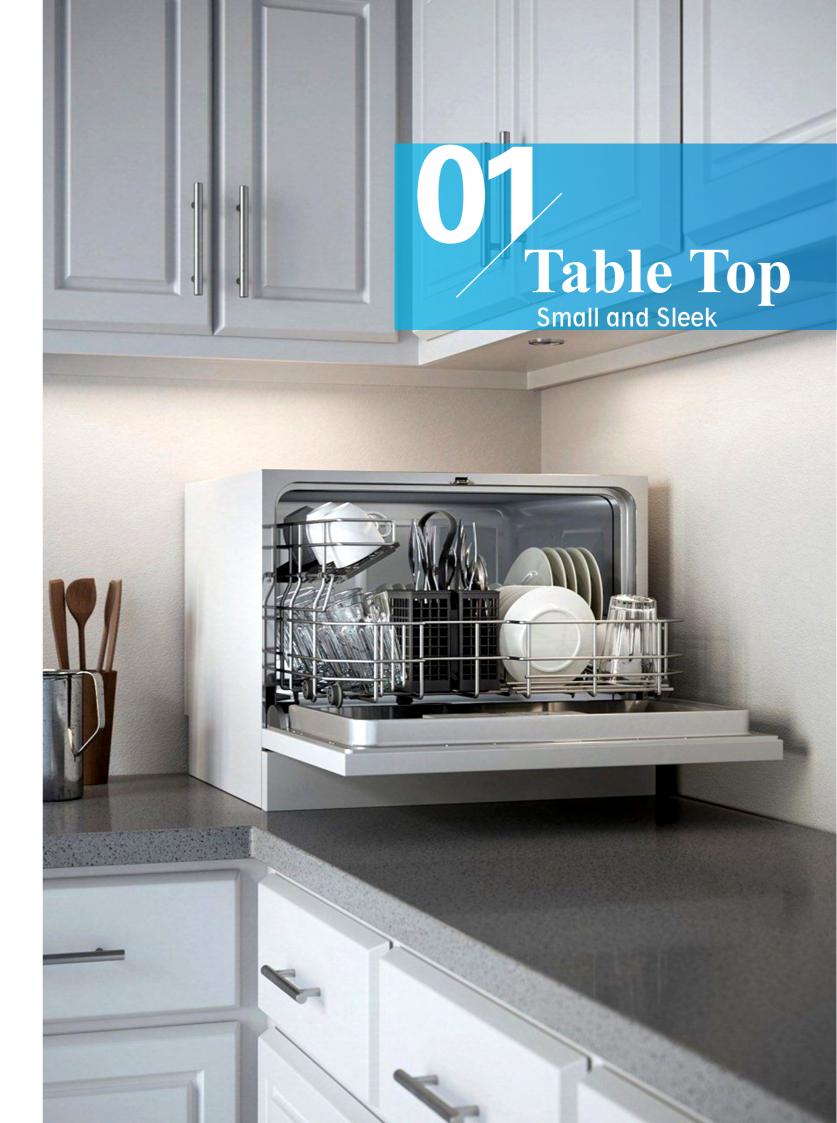







Model	TDD6-55BM(3602H)	TDD6-55BME(3602D)
Capacity (Place settings)	6	6
Energy Efficiency	A+AA	A+AA
Program Number	8	6
Delay Time	1-24H	1-24H
Control	Button	Button
Color	White/Silver/Black/SS	White/Silver/Black/SS
Product (W*D*H)	550*524*438mm	550*500*438mm
Loading (40'HQ)	400pcs	400pcs



Model	TDD6-55TM(3608A)
Capacity (Place settings)	6
Energy Efficiency	A+
Program Number	7
Delay Time	1-24H
Control	Touch
Color	White/Black/Silver
Product (W*D*H)	550*500*438mm
Loading (40'HQ)	400pcs











Model	TDF12-60BG(A)	TDF12-60KG(E)
Capacity (Place settings)	12	12
Energy Efficiency	A+AA	A++AA
Program Number	6	6
Delay Time	3 or 6 or 9 H	1-24 H
Control	Button	Knob
Color	White	White
Product (W*D*H)	600*600*845mm	600*600*850mm
Loading (40'HQ)	162pcs	162pcs





Model	TDF12-60TG(K)	TDF12-60TG(M)
Capacity (Place settings)	12	12
Energy Efficiency	A++AA	A++AA
Program Number	6	6
Delay Time	1-24 H	1-24 H
Control	Touch	Touch
Color	Stainless Steel	White
Product (W*D*H)	600*600*845mm	600*600*845mm
Loading (40'HQ)	162pcs	162pcs





Model	TDF12-60BG(T)	TDF14-60TG(M)
Capacity (Place settings)	12	14
Energy Efficiency	A++AA	A++AA
Program Number	6	6
Delay Time	1-24 H	1-24 H
Control	Button	Touch
Color	White	White
Product (W*D*H)	600*600*845mm	600*600*845mm
Loading (40'HQ)	162pcs	162pcs





Model	TDF14-60TGA(AA1)	TDF14-60BSM(7631A)
Capacity (Place settings)	14	14
Energy Efficiency	3.5 Stars	A++
Program Number	6	8
Delay Time	1-24 H	1-24 H
Control	Touch	Button
Color	Stainless Steel	Stainless Steel
Product (W*D*H)	596*560*820mm	598*600*845 mm
Loading (40'HQ)	162pcs	162pcs





TDF15-60BG(S)
15
A++AA
6
1-24 H
Button
Stainless Steel
600*600*845mm
162pcs











Model	TDB8-57BMU	TDB9-45BG(B)
Capacity (Place settings)	8	9
Energy class	Energy Star V6.0	A+AA
Program Number	6	6
Delay time	1-24 H	1-24 H
Control	Touch	Button
Color	White/Black/Stainless steel	White
Unit dimensions(W*D*H)	570*448*825	448*558*815mm
Loading (40'HQ)	225pcs	252pcs





Model	TDB12-60BG(A)	TDB12-60BG(411B)
Capacity (Place settings)	12	12
Energy class	A++AA	A++AA
Program Number	5	7
Delay time	1-24 H	1-24 H
Control	Button	Button
Color	White	White
Unit dimensions(W*D*H)	596*558*815mm	596*558*815mm
Loading (40'HQ)	162pcs	162pcs




Model	TDB12-60BG(B)	
Capacity (Place settings)	12	
Energy class	A++AA	
Program Number	7	
Delay time	1-24 H	
Control	Button	
Color	White	
Unit dimensions(W*D*H)	596*558*815mm	
Loading (40'HQ)	162pcs	







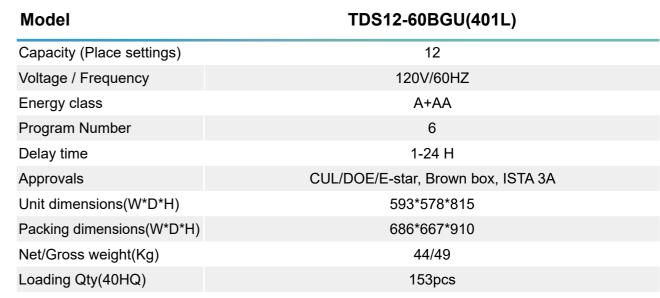



Model	TDS12-60TG(K)	
Capacity (Place settings)	12	
Voltage / Frequency	220~240V/50HZ	
Energy class	A++AA (259kwh)	
Program Number	6	
Delay time	1-24 H	
Approvals	GS/CE/ROHS/CB/REACH	
Unit dimensions(W*D*H)	596*578*815mm	
Packing dimensions(W*D*H)	656*675*875mm	
Net/Gross weight(Kg)	44/49	
Loading Qty(40HQ)	162pcs	









Model	TDS12-60BMU
Capacity (Place settings)	12
Energy class	Energy Star
Program Number	6
Delay time	1-24 H
Control	Button
Color	White
Approvals	UL/CUL/NSF
Unit dimensions(W*D*H)	606*674*857mm
Packing dimensions(W*D*H)	752*660*884mm
Loading (40'HQ)	158pcs



Model	TDS14-60BG(S)	
Capacity (Place settings)	14	
Voltage / Frequency	220~240V/50HZ	
Energy class	A++A (266kwh)	
Program Number	6	
Delay time	1 ~ 24H	
Approvals	GS/CE/ROHS/CB/REACH	
Unit dimensions(W*D*H)	596*578*815mm	
Packing dimensions(W*D*H)	675*656*875mm	
Net/Gross weight(Kg)	44/49	
Loading Qty(40HQ)	162pcs	





Model	TDS14-60TG(M)	TDS14-60TG(K)
Capacity (Place settings)	14	14
Voltage / Frequency	220~240V/50HZ	220~240V/50HZ
Energy class	A++A (266kwh)	A++A (266kwh)
Program Number	6	6
Delay time	1-24 H	1-24 H
Approvals	GS/CE/ROHS/CB/REACH	GS/CE/ROHS/CB/REACH
Unit dimensions(W*D*H)	596*578*815mm	596*578*815mm
Packing dimensions(W*D*H)	675*656*875mm	675*656*875mm
Net/Gross weight(Kg)	44/49	44/49
Loading Qty(40HQ)	162pcs	162pcs

